
GK700

Electric Release


- Operating voltage 12~24Vac/Vdc
- Fail-Safe/Fail-Secure *(Selectable)*
- High security
- Dual monitored lock and cam



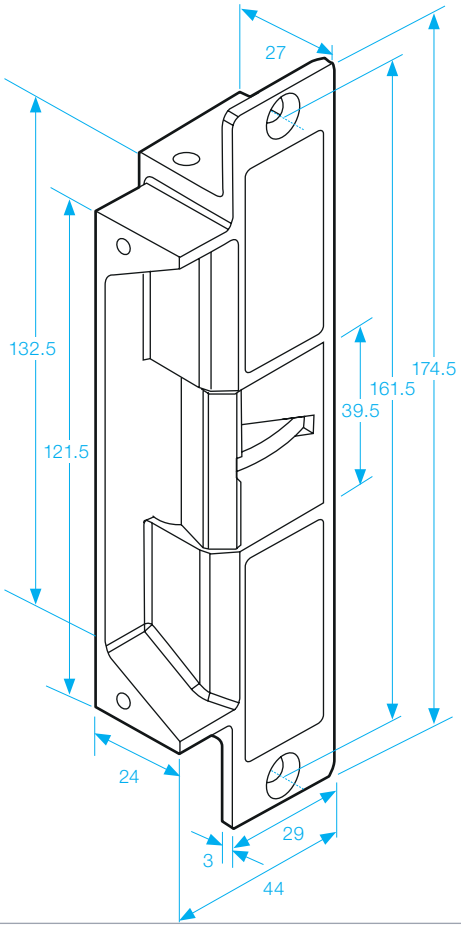

FLEXIBLE SOLUTIONS

The GK700 electric strike can easily change between Fail-Safe and Fail-Secure modes. This unique design enables distributors to reduce inventory and still meet varying needs and requirements of end users.

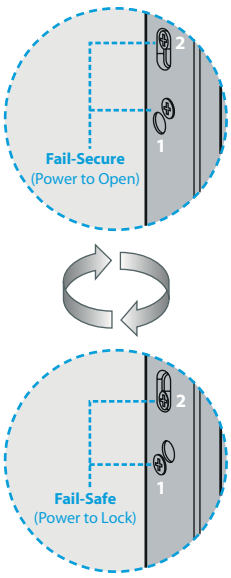

SPECIFICATION

- Voltage tolerance: ±15%.
- Current draw: 210mA at 12Vdc, 140A at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~45°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Humidity: 0~95% non-condensing.
- Tested to 1,000,000 cycles
- 2000lbs jaw strength pull testing.